


## SELECTA MAXI Gully unit T profile - Grating with selector bar - C250 class



AxB	Grating mass	Cover mass	Mass of frame + extension	Total mass	Waterway area	Packaging	References
750x640 mm	27 kg	24 kg	44 kg	89 kg	10.1 → 13 dm²	6	ECSE75UFX11

AxB	C	D	E	H	h1	h2	Depth adjustment
750x640 mm	250 mm	310 mm	347 mm	225 mm	90 mm	65 mm	70 mm

For the regulation from 90 to 115 mm, please deprive nuts and intermediate slices of the assembly. In the installation: plan wedgings to obtain the wished quotation. Measurements of extension: (compared to the water wire) - Low position= H-h2 = 90 mm - High position = H-h2 = 160 mm.

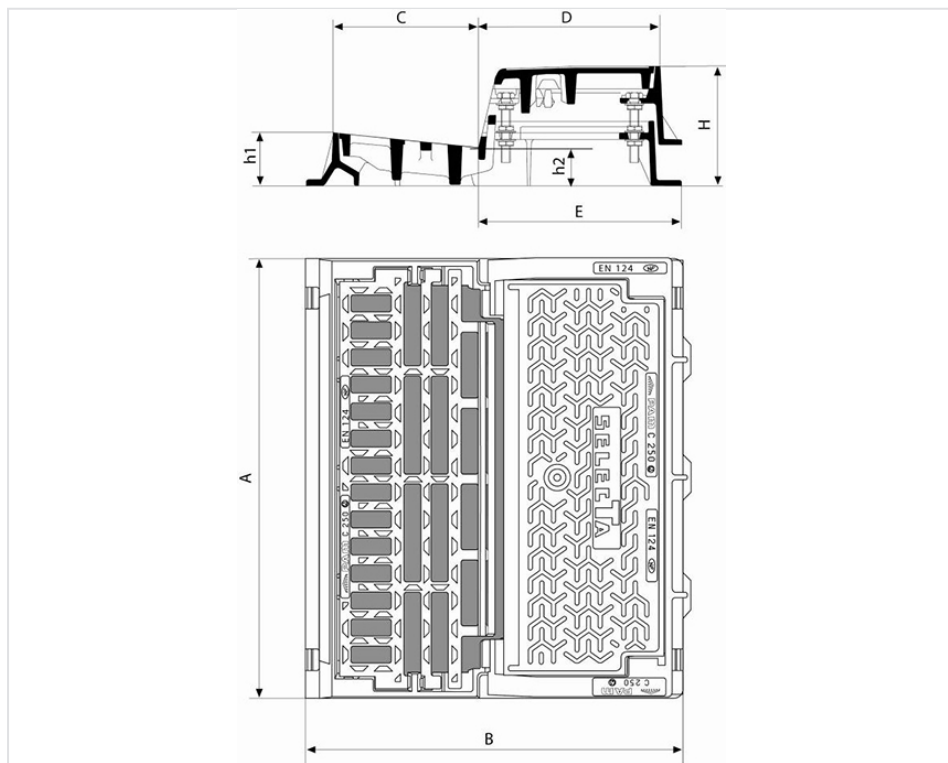

### Material and coating:

- Frame, grating and cover in Ductile Iron EN GJS 400-15: water base

### Origine France Garantie

- This product is made in France in our foundry in Blénod-les-Pont-A-Mousson (54), and is certified Origine France Garantie. This guarantees consumers that the product is made in France in accordance with specifications available on [originefrancegarantie.fr](http://originefrancegarantie.fr). The certification number is: BVCert 6026906.
- "Origine France Garantie certification is awarded by an independent certification body. Checks are then carried out every year to ensure that the product is indeed 100% made in France and that at least 50% of the product's manufacturing costs (including raw materials) are of French origin".»

## Field of application:

- C250 class (Group 3) according to standard EN 124-2, destined to the circulated pavements and similar locations exposed to the access of vehicles.
- Compatible with the T2, T3, T4 and T5 kerbs and CS2, CS3 and CS4 gutters according standard to NF P 98-340.

## Main characteristics:

- Grating and cover:
  - Hinged separately and can be easily dismantled
  - Secured by spring-bar lock requiring a tool for the opening.
- Grating:
  - With raised selector bar allowing the screening of debris
  - Optimized design for absorption and safety.
- Total opening offering a wide surface of access: 540 x 450 mm.
- Frame in 2 parts adjustable in height and slope.
- [Implementation](#)

## Linked products



Gully units SELECTA 500  
and MAXI C250 -  
Implementation

*The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.*